



IRP600 7Axis Ballscrew - Fanuc

Product Specification - Version 1, Release 1



Zeeko

Rev. 130815

Contents

1	Machine Description	2
2	Arrangement of the Axes	3
3	Polymer Granite Machine Base and Bridge.....	4
4	Linear Axes	5
5	Rotary Axes & Spindles.....	6
6	Machine Enclosures	8
7	Control System.....	9
8	Guards, Covers & Safety Features.....	10
9	ZeekoJet Polishing (Option).....	11
10	Summary Specification	13
	10.1 General	13
	10.2 Linear Axes.....	13
	10.3 Rotary Axes	14
	10.4 Contact	14

1 Machine Description

The IRP600 is a 7 axis CNC optical polishing/form generating machine capable of producing ultra-precise surfaces on a wide range of materials and surface forms. The machine axes can be used for traditional spiral, raster, and free-form polishing.

- ❖ Mass = 8000 Kg
- ❖ Dimensions = 2100 x 2700 x 2800 (W x D x H mm)

The machine frame is a welded steel structure incorporating the following features:

- ❖ 3 point floor mounting
- ❖ Integrated electrical and pneumatics enclosures
- ❖ 3-point mounting for polymer-granite base

2 Arrangement of the Axes

The arrangement and definition of the 7 CNC axes is as follows:

- ❖ X is a linear axis which mounts horizontally to the polymer-granite bridge. The X axis carriage is a precision machined stainless steel structure.
- ❖ Y is a linear axis, precision machined stainless steel structure, mounted on the polymer-granite base and aligned perpendicular to the X axis.
- ❖ Z is a linear axis, precision machined stainless steel structure, mounted vertically on the Y axis and is aligned perpendicular to both the X and Y axes.
- ❖ C is a rotational axis that holds the work piece. It is mounted on the Z-Axis.
- ❖ A, B and H are rotational axes configured such that the polishing head (H axis) rotates through a point in space call the Virtual Pivot (VP). This three axes assembly mounts on the X-Axis.

3 Polymer Granite Machine Base and Bridge

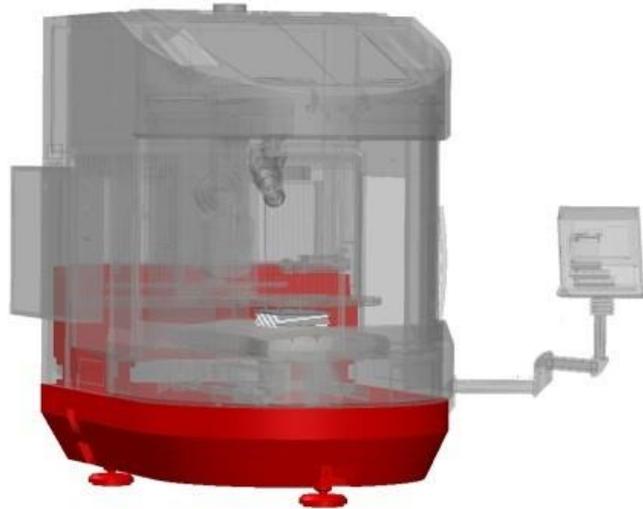


Figure 1: Polymer Granite Base & Welded Steel Frame

The machine base and bridge are precision cast and machined polymer-granite composite structures that provides excellent thermal stability and vibration damping characteristics. This key machine element incorporates the following features:

- ❖ Moulded-in stainless steel inserts for mounting and alignment of the X and Y axes and for machine handling and transportation.
- ❖ Threaded stainless steel inserts for mounting the polishing enclosure.
- ❖ Moulded-in feeds for electrical supply and control cables, compressed air, and slurry supply and return.

4 Linear Axes

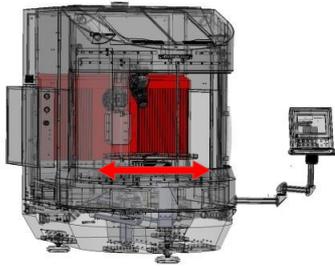


Figure 2: X Axis

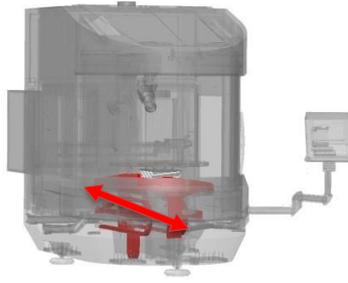


Figure 3: Y Axis

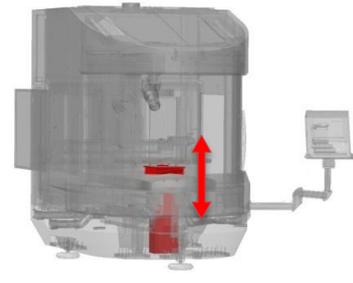


Figure 4: Z Axis

Each axis is mounted on a pair of precision THK linear motion rails and driven via an AC servo motor and precision ground ballscrew. Home positions measured via absolute rotary encoders (or optional linear encoders).

- ❖ Slide type: THK linear motion rails
- ❖ Travel (X Axis): $\pm 350\text{mm}$
- ❖ Travel (Y Axis) $\pm 350\text{mm}$
- ❖ Travel (Z Axis) 500mm
- ❖ Drive system: AC servo driven precision ground ballscrew
- ❖ Positioning feed-back: Home position via absolute rotary encoder
- ❖ Max velocity: 3000mm/min

5 Rotary Axes & Spindles

The A,B & H axes provide the primary tool motions and are often referred to as the Virtual Pivot (VP). The VP is mounted directly to the polymer-granite base.

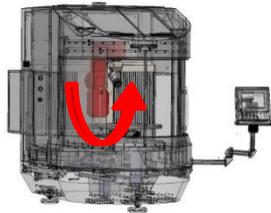


Figure 5: A Axis

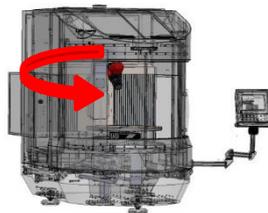


Figure 6: B Axis

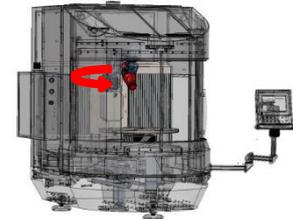


Figure 7: H Axis

The A-axis is mounted to the X-Axis via an AC servo drive Harmonic Drive unit with enhanced radial stiffness. Referencing of the position is via a non-contact referencing element. Referencing is only required following power up of the machine.

- ❖ Rotational Range: -90° to +45°
- ❖ Max Rotational Velocity: 25 rpm

The B axis is mounted to the A axis via AC servo driven Harmonic Drive unit. Referencing of the position is via a non-contact referencing element. Referencing is only required following power up of the machine.

- ❖ Rotational Range: ±180°
- ❖ Max Rotational Velocity: 25 rpm

The H axis forms the tool holding spindle and is mounted to the A/B axes and completes the virtual pivot assembly. Drive is provided via a DC frameless motor with position feedback from a rotary encoder. Spindle is cooled by external SMC chiller system. Tooling mounts via a Ø40mm hydrodehn chuck. The H axis also integrates a load cell arrangement to facilitate part probing essential for process stability and part/machine referencing.

- ❖ Speed Range: 10 to 3000
- ❖ Polishing Head radii: Solid or Inflatable R40, Inflatable R80, R160

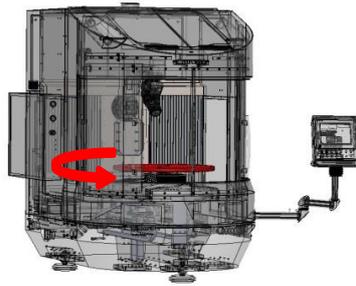


Figure 8: C Axis/Spindle

The C Axis forms the work piece mounting spindle and is mounted to the Z-Axis. The axis consists of rolling element bearings driven by a Brushless DC servo motor, with positional feedback provided by a precision absolute encoder. Spindle is cooled by external SMC chiller system.

The Spindle is supplied with a Ø700mm turntable and Ø40mm hydrodehn chuck for work piece mounting.

- ❖ Speed Range: 0 to 250rpm with turntable, 0 to 1000 rpm with chuck
- ❖ Max Load Capacity: 200kg
- ❖ Vacuum (Optional): -0.8bar maximum

6 Machine Enclosures

The Machine enclosures are provided as follows:

- ❖ Uncoated stainless steel polishing enclosure (internal surfaces)
- ❖ Slurry return drain passing through the granite base.
- ❖ Slide protection for the X, Y, and Z axes.
- ❖ Isolated machine electrical and pneumatic systems.
- ❖ Maintenance access to X, Y, and Z axes.

7 Control System



Figure 9: Control Console

Zeeko Fanuc (30i-B) System

- ❖ Industrialised PC with 15" Touch Colour LCD Screen with Softkeys
- ❖ 5-axes interpolation (export controlled) with cubic, polynomial, and B-spline (NURBS) capability
- ❖ Designation of control paths: 1 path
- ❖ Least Command Increment: 1µm
- ❖ Processor: Panel i - Windows embedded Standard 7 OS
- ❖ Data Server option for up to 4GB NC programs

8 Guards, Covers & Safety Features

The equipment specified herein shall conform to requirements of EC and international safety regulations as required by current legislation.

Cover and guards will be provided to protect the operator from:

- ❖ Moving machine parts
- ❖ Slurry and spray

Covers will also protect machine elements from:

- ❖ Slurry and fluids
- ❖ Airborne dust and debris

Electrical interlocks will prevent opening of:

- ❖ The polishing enclosure door when the machine is in cycle.
- ❖ Electrical cabinet when the machine is energised

An emergency stop button readily accessible to the machine operator

10 ZeekoJet Polishing (Option)

H-axis is a 'combo head' capable of Classic polishing and additionally Fluid Jet Polishing (FJP). FJP specification is as follows:

- ❖ Bonnet and hydraulic chuck are removed and optional FJP adaptor is assembled. Adaptor has removable probe for probing routines.
- ❖ Nozzle bore range available: 0.25, 0.5, 1.0, 1.5mm
- ❖ Maximum rated pressure is 20bar.

11 Summary Specification

11.1 General

General	Description
System Configuration	7 Axis CNC Optical Polishing Machine constructed on Polymer Granite Machine Base and Bridge, capable of producing ultra-precise surfaces on a variety of optical materials and surface forms.
Work piece Capacity (1)	Nominal polishing envelope of 600x600x250mm
Base Structure	Polymer Granite
Control System	Fanuc 30i
Dimensions (No Accessories) WxDxH	2100mm x 2700mm x 2800mm
Suggested Install Dimensions	4100mm x 4700mm x 4300mm
Weight	8000Kg
Floor Load Requirements	Minimum point loading 165,000Kg/m ² Floor must be even to <3mm/m ²
Environmental Requirements Min/Max Operating Temp. Max Operating Humidity Min/Max Storage Temp. Max Storage Humidity	15°C - 35°C (<2°C/hour Temperature Gradient) 75% RH Non Condensing -15°C - 50°C 80% RH Non Condensing
Power Supply Requirements	3Phase+N+E, 200/220/240/420/480VAC 50/60Hz 12KW
Services Requirements	Clean dry air at 250L/min with minimum pressure of 6bar (300L/min with linear encoders)
Noise Level	<50b(A) Continuous
Safety	In accordance with EC Directives 2006/42/EC, 2004/108/EC (EMC) and 2006/95/CE (Low Voltage)

11.2 Linear Axes

Description	X	Y	Z
Slide Type	THK Linear Motion Rails	THK Linear Motion Rails	THK Linear Motion Rails
Drive Type	AC Servo driven precision ground ballscrew	AC Servo driven precision ground ballscrew	AC Servo driven precision ground ballscrew
Feedback Type	Absolute Rotary Encoder (Optional Linear Encoder)	Absolute Rotary Encoder (Optional Linear Encoder)	Absolute Rotary Encoder (Optional Linear Encoder)
Travel	±350mm	±350mm	+5mm , -495mm Max VP-Turntable Distance=(590)mm Min VP-Turntable Distance=(90)mm
Max Velocity	3000mm/min	3000mm/min	3000mm/min
Max Acceleration	250mm/sec ²	250mm/sec ²	250mm/sec ²
Positioning Accuracy	<50µm over full travel	<50µm over full travel	<50µm over full travel
Bi-direction Repeatability	<5µm	<5µm	<5µm
Straightness: Horizontal: Vertical:	<30µm over full travel <5µm over 100mm	<30µm over full travel <5µm over 100mm	<30µm over full travel <5µm over 100mm
Squareness	<50µm/m	<50µm/m	<50µm/m
Circularity	<50µm	<50µm	<50µm

11.3 Rotary Axes

Rotary Axes	A	B	H (Tool)	C (Workpiece)
Mounting	Epoxy-Granite Base	A Axis Arm	Virtual Pivot Assembly	Z Axis Carriage
Spindle/Axis	Axis	Axis	Spindle	Spindle & Axis
Cooled	Not Req'd	Not Req'd	Yes	Yes
Integral Services	N/A	N/A	Air (STD)/ FJP (Optional)	Vacuum (Optional)
Probing	N/A	N/A	125N Load Cell	N/A
Drive	Harmonic Drive Direct Drive	Harmonic Drive Direct Drive	Emoteq DC Frameless Direct Drive	Emoteq DC Frameless Direct Drive
Feedback Type	Motor Encoder	Motor Encoder	Rotary Encoder, 5000lines/min	Absolute Encoder
Speed Range	0-25rpm	0-25rpm	0-3000rpm	0-1000rpm (chuck) 0-250rpm (table)
Load Capacity				150Kg
Maximum Inertial Load ¹	N/A	N/A	N/A	2.0Kg*m ² @20rad/s ²
Positional Repeatability @ Motor	±1arcmin	±1arcmin	-	±1arcmin
Working Range	+45°,-90°	±180°	Continuous- bi directional	Continuous- bi directional
Radial Run-Out	Rotation of VP Setting ball mounted in H Axis Chuck and rotated about the Virtual Pivot < 40µm			<5µm
Axial Run-out				<20µm

11.4 Contact

For more information, please visit our website (www.zeeko.co.uk) or contact us via the following:

Zeeko Ltd. | 4 Vulcan Court | Vulcan Way
Coalville | Leicestershire | LE67 3FW | UK
+44 1530 815 832
info@zeeko.co.uk
sales@zeeko.co.uk

¹ Maximum Inertial load in standard configuration. Variations may be possible with servo retuning – contact Zeeko for advice.